

2507/206

COMMUNICATION AND
TELECOMMUNICATION SYSTEMS

June/July 2019

Time: 3 hours



THE KENYA NATIONAL EXAMINATIONS COUNCIL

DIPLOMA IN AERONAUTICAL ENGINEERING
(AVIONICS OPTION)

MODULE II

COMMUNICATION AND TELECOMMUNICATION SYSTEMS

3 hours

INSTRUCTIONS TO CANDIDATES

You should have the following for this examination:

Answer booklet;

Non-programmable scientific calculator.

This paper consists of EIGHT questions in TWO sections; A and B.

Answer FIVE questions by choosing any THREE questions from section A and any TWO questions from section B in the answer booklet provided.

All questions carry equal marks.

Maximum marks for each part of a question are as indicated.

Candidates should answer the questions in English.

Take: Velocity of light $c = 3 \times 10^8$ m/s

Earth radius $R = 6400$ km

This paper consists of 7 printed pages.

Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

SECTION A: COMMUNICATION SYSTEMS

Answer any **THREE** questions from this section.

1. (a) (i) Define each of the following with respect to satellite communication:
- (I) angle of inclination;
 - (II) apogee.
- (2 marks)
- (b) (i) Explain frequency division multiple access (FDMA) with respect to satellite communication.
- (ii) Describe the no-break power supply connection used in an earth satellite station.
- (6 marks)
- (c) (i) An earth satellite station operates at 6 GHz using a parabolic dish antenna whose mouth diameter is 36 m with an illumination efficiency of 80%. The link noise temperature is 88 K. Determine the G/T ratio of the station in dB/K.
- (ii) A satellite in a synchronous orbit operates at 4000 MHz using transmitting and receiving antennas whose gains are 15 dB and 40 dB respectively. Determine the:
- (I) free space path loss;
 - (II) total loss;
 - (III) power received when the radiated power is 500 W.
- (12 marks)
- ~~Q.~~ (a) (i) List **two** advantages of frequency modulation (FM) over amplitude modulation (AM).
- (ii) An AM system has a carrier wave, $E_c \sin \omega_c t$ and the modulating signal is $E_m \sin \omega_m t$. Derive the expression for the instantaneous value, e_{AM} , of the modulated signal when the modulation index is m .
- (11 marks)
- (b) An FM system has a modulating signal of 15 kHz and the modulation index is 6. Determine the:
- (i) frequency deviation;
 - (ii) system bandwidth.
- (4 marks)
- (c) An AM transmitter drives a current of 18 A into an antenna when the depth of modulation is 52%. Determine the depth of modulation if simultaneous modulation by another sinewave increases the transmitter current to 21 A.
- (5 marks)

3. (a) State the function of each of the following in TV systems:

(i) duplexer;

(ii) TV camera.

(2 marks)

(b) Figure 1 shows a simplified block diagram of the colour picture signal chain of a colour TV receiver. Describe its operation. (5 marks)

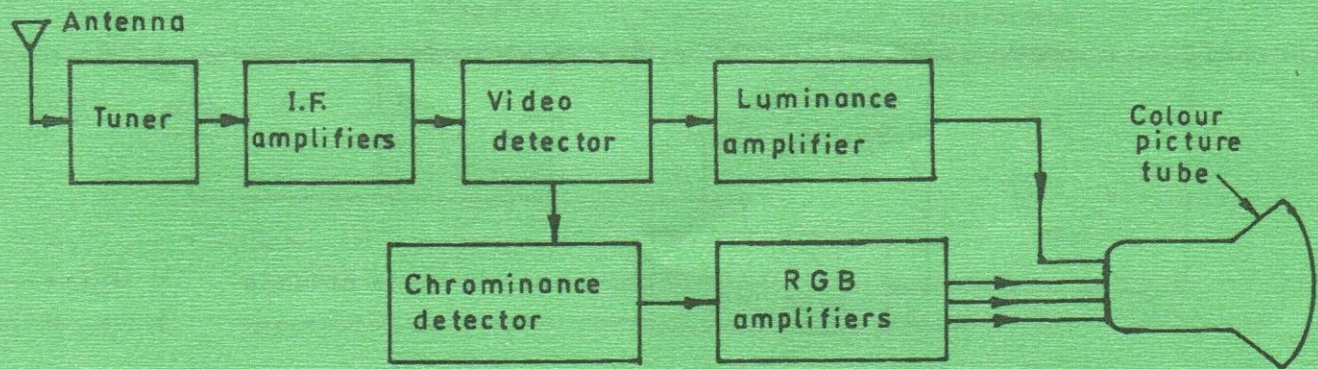


Fig. 1

(c) (i) With the aid of a response curve, describe interleaving as applied to transmission of colour TV picture signal.

(ii) With the aid of a labelled construction diagram, describe the operation of a charge coupled device (CCD) sensor used in TV cameras.

(13 marks)

4. (a) Describe each of the following emerging technologies:

(i) digital TV transmission;

(ii) streaming stored audio/video.

(6 marks)

(b) Draw a labelled block diagram of an FM stereo encoder and describe its operation.

(9 marks)

(c) A transistor reactance modulator has an oscillator whose capacitance and inductance are 20 pF and 8 nH respectively. When the modulating signal is applied, the effective capacitance increases by 4 pF. Determine the frequency deviation of the FM wave.

(5 marks)

5. (a) Define each of the following as applied to radar systems:

- (i) duty cycle;
- (ii) 2nd return echoes.

(2 marks)

(b) (i) Figure 2 shows a line pulser unit of a pulsed radar. Describe its operation.

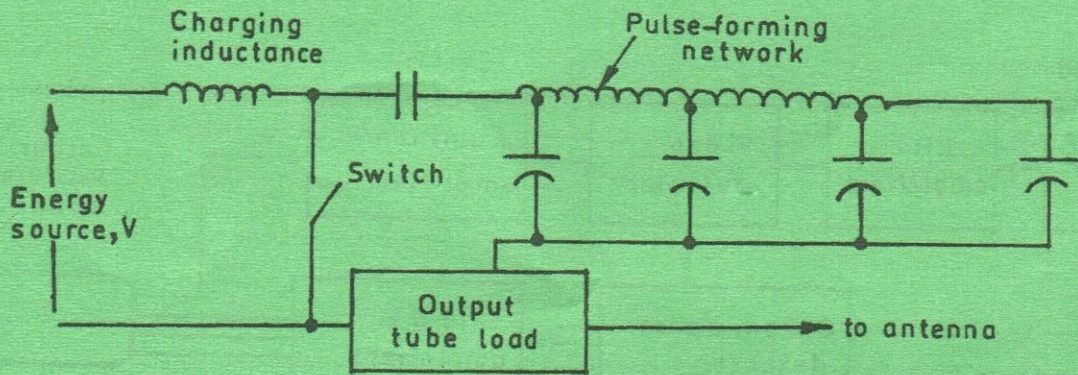


Fig. 2

(ii) With the aid of a labelled block diagram, describe the operation of a continuous wave Doppler radar system. (9 marks)

(c) (i) An 8 GHz radar system scans a target over a range of 600 km in 20 seconds. Determine the:

- (I) target relative velocity;
- (II) doppler frequency shift.

(ii) A radar system, operating at 920 MHz over a range of 62 km, uses an antenna whose capture area is 9 m² to radiate 10 kW towards a target whose cross-sectional area is 10 m². Determine the minimum receivable power.

(9 marks)

SECTION B: TELECOMMUNICATION PRINCIPLES

Answer any **TWO** questions from this section.

6. (a) Define each of the following with respect to sky wave radio propagation:
- (i) fading;
 - (ii) critical frequency.
- (2 marks)
- (b) (i) Table 1 shows data for the received signal, E_R , with changes in distance for a UHF link.
- (I) Plot the response curve;
 - (II) Explain its shape;
 - (III) Determine the signal received at a distance of 17.5 km.

Table 1

| Distance (km) | 0 | 4.5 | 6.5 | 10.5 | 11.5 | 15 | 16.5 | 19.5 | 23 | 25.5 | 32.5 |
|----------------------|----|-----|------|------|------|----|------|------|----|------|------|
| Received signal (dB) | 40 | 68 | 43.5 | 57 | 34 | 43 | 29 | 35 | 18 | 23 | 8 |

- (ii) A UHF radio link uses a transmitting and receiving antennas of 120 m and 90 m heights respectively. Determine the maximum range of the link. (8 marks)
- (c) A communication system has an input signal of $40 \mu V$ and an output signal of $8 mV$. The noise at the input is $10 nV$ while the noise at the output is $0.5 \mu V$. Determine the system:
- (i) input signal-to-noise ratio;
 - (ii) output signal-to-noise ratio;
 - (iii) noise figure, in dB.
- (7 marks)
- (d) List any **three** reasons for using logarithmic units in communication systems. (3 marks)

7. (a) (i) List any **two** advantages of optical fibres over coaxial cables in signal transmission. (10 marks)
- (ii) With the aid of a labelled block diagram, describe the operation of a communication system using optical fibre medium. (4 marks)
- (b) With the aid of a raypath diagram, describe signal propagation in a graded index optical fiber. (4 marks)
- (c) An optical fiber has a core of refractive index of 1.76 and cladding of refractive index of 1.71. Determine the:
- (i) numerical aperture;
- (ii) maximum angle of incidence; ≈ 76
- (iii) critical angle. (6 marks)

8. (a) (i) List any **two** areas of application of a klystron oscillator.
- (ii) Figure 3 shows a schematic block diagram of a microwave transmit/receive switch using a PIN diode. Describe its operation. (6 marks)

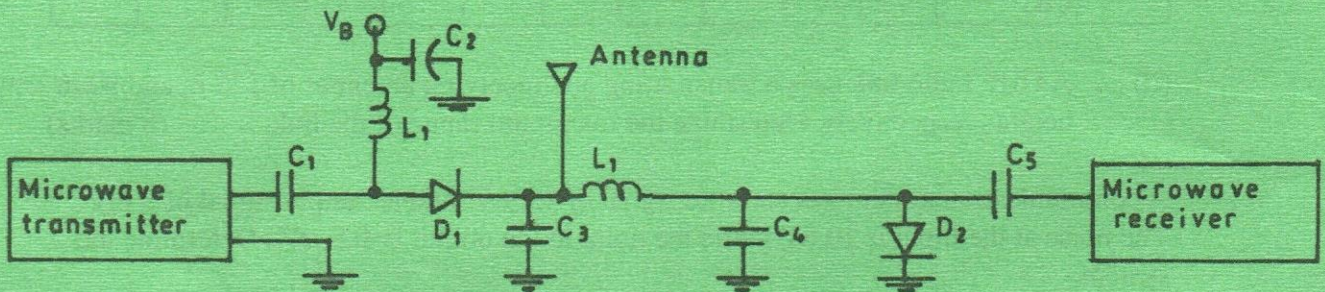


Fig. 3

171

$\frac{171}{176}$

0.9716

- (b) Figure 4 shows the input signal voltage waveform, V_{in} , and the pump signal waveform, V_{pump} , fed into a parametric amplifier. With the aid of the output voltage waveform, describe the operation of the amplifier. (6 marks)

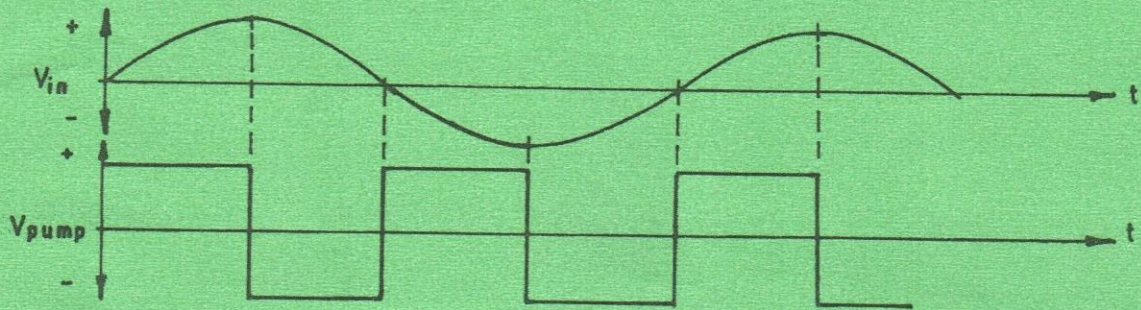


Fig. 4

- (c) (i) A lossless transmission line has an inductance of $440 \mu H/m$ and a capacitance of $0.085 \mu F/m$. Determine the:
- (I) characteristic impedance; $Z_0 = \sqrt{\frac{L}{C}}$
 - (II) phase velocity.
- (ii) A rectangular wave guide measuring $5 \text{ cm} \times 3 \text{ cm}$ has a signal of 6 GHz propagating in it. For the dominant mode, $TE_{1,0}$ mode, determine the:
- (I) cut-off wavelength;
 - (II) cut-off frequency.

(8 marks)

THIS IS THE LAST PRINTED PAGE.