

2506/306  
2507/306  
DATA AND COMPUTER NETWORKS  
Oct./Nov. 2023  
Time: 3 hours



THE KENYA NATIONAL EXAMINATIONS COUNCIL  
DIPLOMA IN AERONAUTICAL ENGINEERING  
(AIRFRAMES AND ENGINES OPTION)  
(AVIONICS OPTION)

MODULE III

DATA AND COMPUTER NETWORKS

3 hours

**INSTRUCTIONS TO CANDIDATES**

*You should have the following for this examination:*

*Answer booklet;*

*Non-programmable scientific calculator.;*

*Drawing instruments.*

*This paper consists of **EIGHT** questions.*

*Answer **FIVE** of the **EIGHT** questions in the answer booklet provided.*

*All questions carry equal marks.*

*Maximum marks for each part of a question are shown.*

*Candidates should answer the questions in English.*

**This paper consists of 7 printed pages**

**Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.**



1. (a) Describe each of the following with respect to data communication:
- (i) baud rate;
  - (ii) bit rate;
  - (iii) data element. (3 marks)
- (b) Describe full duplex mode as applied in data transmission. (2 marks)
- (c) With the aid of a labelled diagram, describe asynchronous transmission mode with respect to digital data communication. (7 marks)
- (d) Figure 1 shows two square waves with period  $T$ . Describe the relationship between:
- (i) the period and frequency;
  - (ii) the period and the phase. (8 marks)

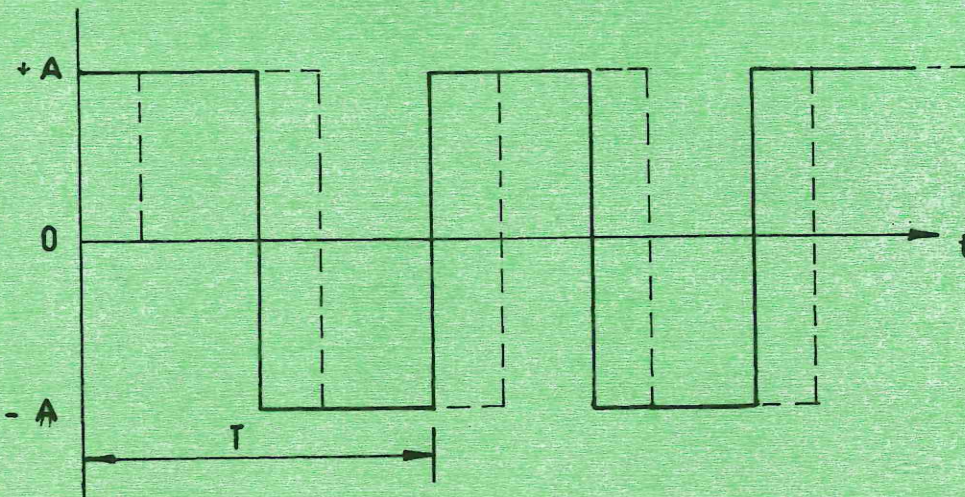


Fig. 1

2. (a) Describe each of the following encoding techniques:
- (i) manchester;
  - (ii) differential Manchester. (4 marks)
- (b) A dataword 1100000000110000010 is to be encoded. Draw waveforms for each of the following encoding schemes:
- (i) Non-Return-to Zero-Level (NRZ-L).
  - (ii) Bipolar - Alternate Mark Inversion (AMI);
  - (iii) High Density Bipolar -3 zeros (HDB3). (8 marks)



(c) Using a dataword 00110100010, draw waveforms for each of the following digital modulation techniques:

- (i) Amplitude Shift Keying (ASK);
- (ii) Binary Frequency Shift Keying (BFSK);
- (iii) Binary Phase Shift Keying (BPSK). (6 marks)

(d) Draw the Quadrature Phase shift Keying Modulator (QPSK). (2 marks)

x 3. (a) With the aid of a labelled block diagram, describe the functions of each component of a pulse code modulator (PCM). (8 marks)

(b) (i) Define each of the following:

- I. sampling rate;
- II. nyquist (sampling) theorem.

(ii) Describe delta modulation as used in data transmission. (6 marks)

(c) Table 1 shows a list of codewords and datawords. Determine the minimum hamming distance. (6 marks)

**Table 1**

Datawords	Codewords
0 0	0 0 0
0 1	0 1 1
1 0	1 0 1
1 1	1 1 1



4. (a) A data 1010001101 is transmitted through a digital network. The polynomial generator pattern P is 110101. Using the cyclic redundancy check (CRC) determine the:

- (i) frame check sequence (FCS);
  - (ii) transmitted codeword.
- (8 marks)

(b) Table 2 shows standard polynomials of cyclic redundancy check consultative committee for international telegraphy and telephony (CRC CCITT) standard patterns. Complete the table. (6 marks)

**Table 2**

Name	Polynomial	Application
CRC - 8		
CRC - 16		
CRC - 32		

(c) With the aid of a labelled diagram, describe the elements of a wavelength division multiplexing transmitter. (6 marks)

5. (a) Outline **two** merits of using packet switching as a form of communication. (2 marks)

(b) With the aid of a labelled diagram, describe virtual packet switched networks. (7 marks)

(c) Figure 2 shows routing strategy applied in routing of packets from station A to station F. The costs between the stations are as indicated.

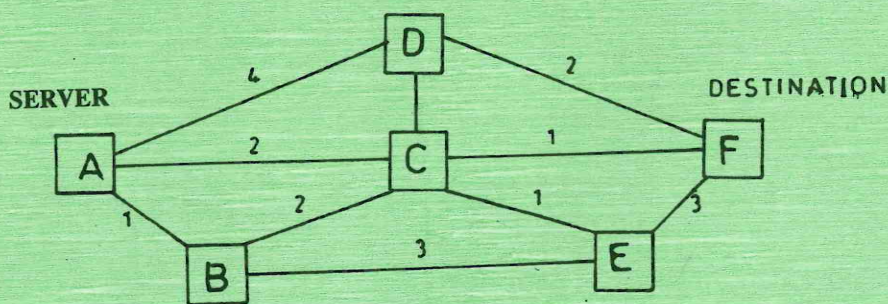


Fig. 2

Determine the:

- (i) most expensive route taken for transmission of data.
  - (ii) longest route with least cost;
  - (iii) shortest route with highest cost.
- (d) State the phases that a circuit switching uses in communication in a dedicated line channel. (3 marks)
- (8 marks)



6. (a) (i) Define demultiplexing as used in data communication.
- (ii) List **three** limitations of frequency division multiplexing. (4 marks)
- (b) With the aid of a labelled diagram, describe frequency division multiplexing (FDM). (8 marks)
- (c) (i) Draw the open system interconnection (OSI) reference model.
- (ii) State two functions of layers 2 and 3 of the model in (i). (8 marks)
- ✓ 7. (a) List **three** institutions that regulate standardisation in data transmission. (3 marks)
- (b) State **three** safety measures considered when implementing a Local Area Network (LAN) in an organisation. (3 marks)
- (c) (i) With the aid of a labelled diagram describe how token passing is achieved in Ring Topology Network.
- (ii) State **two** merits of the topology in (c)(i). (8 marks)
- (d) Figure 3 shows a diagram of a LAN topology.

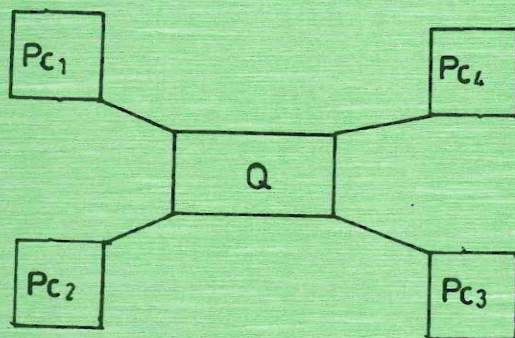


Fig.3

- (i) Identify the:
- I. type of LAN topology used;
  - II. device labelled Q.
- (ii) Describe the operation of the topology in (d)(i). (6 marks)



8. (a) Table 3 shows characteristics of high speed LANs. Complete the table. (8 marks)

**Table 3**

	<b>Fast ethernet</b>	<b>Fibre channel</b>	<b>Wireless LAN</b>
<b>Data rate</b>	100 mbps		
<b>Transmission media</b>		Optical/ Fibre coaxial, STP	
<b>Access method</b>	CSMA/ CD		
<b>Supporting standard</b>	IEEE 802.3		

- (b) Describe each of the following high speed ethernet LAN protocols:

- (i) 10 BASE 5;
- (ii) 10 BASE 2;
- (iii) 10 BASE T;
- (iv) 10 BASE F.

(8 marks)

- (c) Describe each of the following as used in data compression:

- (i) Huffman coding;
- (ii) joint picture expert group (JPEG).

(4 marks)



## Decimal - Binary - Octal - Hex - ASCII Conversion Chart

Decimal	Binary	Octal	Hex	ASCII	Decimal	Binary	Octal	Hex	ASCII	Decimal	Binary	Octal	Hex	ASCII	Deci
0	00000000	000	00	NUL	32	00100000	040	20	SP	64	01000000	100	40	@	9
1	00000001	001	01	SOH	33	00100001	041	21	!	65	01000001	101	41	A	9
2	00000010	002	02	STX	34	00100010	042	22	"	66	01000010	102	42	B	9
3	00000011	003	03	ETX	35	00100011	043	23	#	67	01000011	103	43	C	9
4	00000100	004	04	EOT	36	00100100	044	24	\$	68	01000100	104	44	D	10
5	00000101	005	05	ENQ	37	00100101	045	25	%	69	01000101	105	45	E	10
6	00000110	006	06	ACK	38	00100110	046	26	&	70	01000110	106	46	F	10
7	00000111	007	07	BEL	39	00100111	047	27	'	71	01000111	107	47	G	10
8	00001000	010	08	BS	40	00101000	050	28	(	72	01001000	110	48	H	10
9	00001001	011	09	HT	41	00101001	051	29	)	73	01001001	111	49	I	10
10	00001010	012	0A	LF	42	00101010	052	2A	*	74	01001010	112	4A	J	10
11	00001011	013	0B	VT	43	00101011	053	2B	+	75	01001011	113	4B	K	10
12	00001100	014	0C	FF	44	00101100	054	2C	,	76	01001100	114	4C	L	10
13	00001101	015	0D	CR	45	00101101	055	2D	.	77	01001101	115	4D	M	10
14	00001110	016	0E	SO	46	00101110	056	2E	:	78	01001110	116	4E	N	1
15	00001111	017	0F	SI	47	00101111	057	2F	/	79	01001111	117	4F	O	1
16	00010000	020	10	DLE	48	00110000	060	30	0	80	01010000	120	50	P	1
17	00010001	021	11	DC1	49	00110001	061	31	1	81	01010001	121	51	Q	1
18	00010010	022	12	DC2	50	00110010	062	32	2	82	01010010	122	52	R	1
19	00010011	023	13	DC3	51	00110011	063	33	3	83	01010011	123	53	S	1
20	00010100	024	14	DC4	52	00110100	064	34	4	84	01010100	124	54	T	1
21	00010101	025	15	NAK	53	00110101	065	35	5	85	01010101	125	55	U	1
22	00010110	026	16	SYN	54	00110110	066	36	6	86	01010110	126	56	V	1
23	00010111	027	17	ETB	55	00110111	067	37	7	87	01010111	127	57	W	1
24	00011000	030	18	CAN	56	00111000	070	38	8	88	01011000	130	58	X	1
25	00011001	031	19	EM	57	00111001	071	39	9	89	01011001	131	59	Y	1
26	00011010	032	1A	SUB	58	00111010	072	3A	:	90	01011010	132	5A	Z	1
27	00011011	033	1B	ESC	59	00111011	073	3B	;	91	01011011	133	5B	[	1
28	00011100	034	1C	FS	60	00111100	074	3C	<	92	01011100	134	5C	\	1
29	00011101	035	1D	GS	61	00111101	075	3D	=	93	01011101	135	5D	]	1
30	00011110	036	1E	RS	62	00111110	076	3E	>	94	01011110	136	5E	^	1
31	00011111	037	1F	US	63	00111111	077	3F	?	95	01011111	137	5F	_	1

This work is licensed under the Creative Commons Attribution-ShareAlike License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/>

ASCII Conversion Chart.doc Copy

**THIS IS THE LAST PRINTED PAGE**